



AODES

BEYOND ROADS

SIDE-BY-SIDE & PRODUCT SPEC BOOK
vehicle Specifications, Accessories, and Parts & Maintenance

2026

CONTENTS

ATVs

PATHCROSS 300 4WD	04
PATHCROSS 525-L	05
PATHCROSS 625-L	06
PATHCROSS 650L	07
PATHCROSS 800L MUD	08
PATHCROSS X 1000L	09
PATHCROSS X 1000L MUD	10

UTVs


WORKCROSS 550	12
WORKCROSS 650-3	13
WORKCROSS 650-3 HV	14
WORKCROSS 800-3	15
WORKCROSS 800-3 HV	16
WORKCROSS 800-6	17
WORKCROSS 800-6 HV	18
WORKCROSS 1000-3	19
WORKCROSS 1000-3 HV	20
WORKCROSS 1000-3 HVAC	21
WORKCROSS 1000-6	22
WORKCROSS 1000-6 HV	23
WORKCROSS 1000-6 HVAC	24
DESERTCROSS 1000-3	25

SNOWMOBILE

SNOWCROSS 1000 WT	27
SNOWCROSS 1000 SWT	28
SNOWCROSS 1000 SWT SC	29
SNOWCROSS 1000 WT LTS	30
SNOWCROSS 1000 SWT LTS	31
SNOWCROSS 800 WT	32
SNOWCROSS 800 WT LTS	33
FROSTCROSS 900T WT	34
FROSTCROSS 900T SWT	35
FROSTCROSS 900T SWT SC	36

DIRT BIKE

AODES A125	38
AODES A110	39

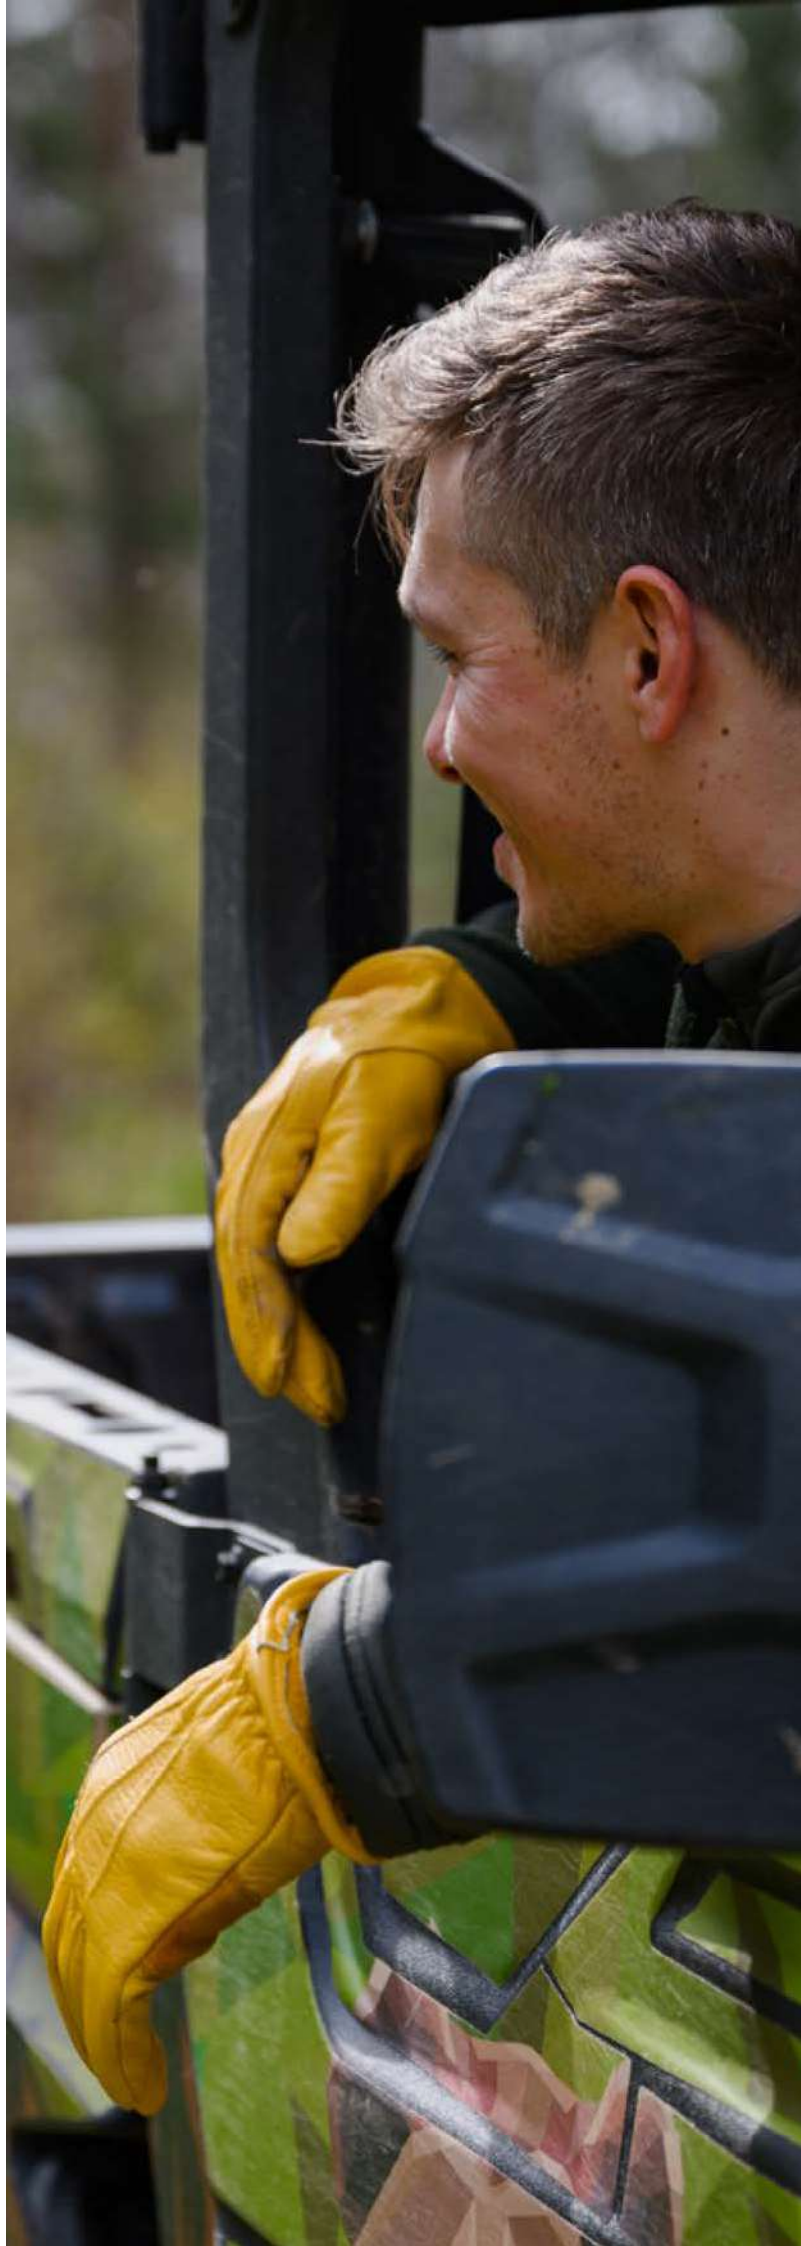



ATVs

ATV300 (4WD)



PACKAGE HIGHLIGHTS

270.5cc Single-Cylinder, 4-Stroke
EFI Engine
17kW / 6800rpm Maximum Power
28N·m / 5500rpm Torque
Compact 4WD Design
300mm Ground Clearance
Lightweight 290kg Dry Weight
15L Fuel Tank
85km/h Top Speed

STANDARD COLOR

-  Orange
-  Grey
-  Green

OPTION PAINTING COLORS

-  Radiant Red
-  Titanium Grey
-  Glacier silver
-  Fire Green
-  Obsidian black
-  Desert Tan
-  True Timber
-  Peral white

OPTION WATER TRANSFER COLOR

-  True Timber camo

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	Single Cylinder, 4-Stroke 270.5 cc 72.7 × 65.2 mm Electronic Fuel Injection 17 kW / 6800 rpm 28 N·m / 5500 rpm Liquid Cooled Electric CVT, L-H-N-R
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 65mm / R 75mm Steel Wheel 25×8-12 Steel Wheel 25×10-12 Preloaded, Oil Damped
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Rack Capacity: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying: GVW: Towing Capacity: Top Speed: Turning Radius:	2129 × 1122 × 1170 mm 1340 mm 300 mm Front 30kg / Rear 45kg 15 L 290 kg 305 kg 155 kg 460 kg 260 kg / 505 kg 85 km/h 3 m

PATHCROSS 525 L



PACKAGE HIGHLIGHTS

495.3cc Single-Cylinder, 4-Stroke EFI Engine
32kW / 7000rpm Maximum Power
46N·m / 5800rpm Maximum Torque
Double A-Arm Independent Suspension
180mm / 220mm Suspension Travel
265mm Ground Clearance
3500LBS Winch
95km/h Maximum Speed

STANDARD COLOR

 Orange  Grey
 Green

OPTION PAINTING COLORS

 Radiant Red  Titanium Grey
 Glacier silver  Fire Green
 Obsidian black  Desert Tan
 True Timber  Peral white

OPTION WATER TRANSFER COLOR

 True Timber camo

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	Single Cylinder, 4-Stroke 495.3 cc 91 × 76.2 mm Electronic Fuel Injection 32 kW / 7000 rpm 46 N·m / 5800 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 180mm / R 220mm Steel Wheel 25×8-12 Steel Wheel 25×10-12 Preloaded, Oil Damped
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Rack Capacity: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: GVW: Towing Capacity: Top Speed: Turning Radius:	2215 × 1172 × 1260 mm 1460 mm 265 mm Front 30kg / Rear 60kg 23 L 375 kg 400 kg 250 kg 650 kg 260 kg / 600 kg 95 km/h 3 m

PATHCROSS 625 L



PACKAGE HIGHLIGHTS

579.85cc Single-Cylinder EFI Engine
35kW / 6500rpm Maximum Power
55N·m / 6000rpm Maximum Torque
Double A-Arm Independent Suspension
180mm / 220mm Suspension Travel
265mm Ground Clearance
3500LBS Winch
100km/h Maximum Speed

STANDARD COLOR

Orange Grey
Green

OPTION PAINTING COLORS

Radiant Red Titanium Grey
Glacier silver Fire Green
Obsidian black Desert Tan
True Timber Peral white

OPTION WATER TRANSFER COLOR

True Timber camo

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	Single Cylinder, 4-Stroke 579.85 cc 91 × 89.2 mm Electronic Fuel Injection 35 kW / 6500 rpm 55 N·m / 6000 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 180mm / R 220mm Steel Wheel 26×9-12 Steel Wheel 26×11-12 Preloaded, Oil Damped
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Rack Capacity: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: GVW: Towing Capacity: Top Speed: Turning Radius:	2215 × 1172 × 1260 mm 1460 mm 265 mm Front 30kg / Rear 60kg 23 L 375 kg 400 kg 250 kg 650 kg 260 kg / 600 kg 100 km/h 3 m

PATHCROSS 650 L



PACKAGE HIGHLIGHTS

649cc V-Twin 4-Stroke EFI Engine
39.5kW / 6300rpm Maximum Power
62N·m / 5300rpm Torque
Double A-Arm Independent Suspension
180mm / 190mm Suspension Travel
283mm Ground Clearance
3500LBS Winch
105km/h Maximum Speed

STANDARD COLOR

Orange Grey
Green

OPTION PAINTING COLORS

Radiant Red Titanium Grey
Glacier silver Fire Green
Obsidian black Desert Tan
True Timber Peral white

OPTION WATER TRANSFER COLOR

True Timber camo

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 649 cc 82 × 61.5 mm Electronic Fuel Injection 39.5 kW / 6300 rpm 62 N·m / 5300 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 180mm / R 190mm Steel Wheel 26×9-14 Steel Wheel 26×11-14 Preloaded, Oil Damped
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Rack Capacity: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: GVW: Towing Capacity: Top Speed: Turning Radius:	2450 × 1246 × 1400 mm 1508 mm 283 mm Front 20kg / Rear 40kg 22 L 450 kg 470 kg 220 kg 690 kg 300 kg 105 km/h 3.2 m

PATHCROSS 800 L MUD



PACKAGE HIGHLIGHTS

800cc V-Twin 4-Stroke EFI Engine
44kW / 6000rpm Maximum Power
73N·m / 5000rpm Maximum Torque
Specialized for Mud Riding Terrain
308mm Ground Clearance
Air Spring Shock Absorber System
3500LBS Winch
110km/h Maximum Speed

STANDARD COLOR

Orange Grey
Green

OPTION PAINTING COLORS

Radiant Red Titanium Grey
Glacier silver Fire Green
Obsidian black Desert Tan
True Timber Peral white

OPTION WATER TRANSFER COLOR

True Timber camo

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 800 cc 91 × 61.5 mm Electronic Fuel Injection 44 kW / 6000 rpm 73 N·m / 5000 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 130mm / R 130mm Alloy Wheel 28×9-14 Alloy Wheel 28×11-14 Air Spring Shock Absorber
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Rack Capacity: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: GVW: Towing Capacity: Top Speed: Turning Radius:	2450 × 1246 × 1400 mm 1508 mm 308 mm Front / Rear: 40kg 22 L 490 kg 514 kg 200 kg 714 kg 160 kg 110 km/h 3.2 m

PATHCROSS X 1000 L



PACKAGE HIGHLIGHTS
976cc V-Twin 4-Stroke EFI Engine
63.7kW / 6500rpm Maximum Power
101N·m / 5500rpm Peak Torque
Double A-Arm Independent Suspension
283mm Ground Clearance
Alloy Wheels 26×9-14 / 26×11-14
3500LBS Winch
115km/h Maximum Speed

- STANDARD COLOR**
- Orange

Green

Grey
- OPTION PAINTING COLORS**
- Radiant Red

Glacier silver

Obsidian black

True Timber

Titanium Grey

Fire Green

Desert Tan

Peral white
- OPTION WATER TRANSFER COLOR**
- True Timber camo

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 976 cc 91 × 75 mm Electronic Fuel Injection 63.7 kW / 6500 rpm 101 N·m / 5500 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent — Alloy Wheel 26×9-14 Alloy Wheel 26×11-14 Preloaded, Oil Damped
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Rack Capacity: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: GVW: Towing Capacity: Top Speed: Turning Radius:	2450 × 1246 × 1400 mm 1508 mm 283 mm Front 20kg / Rear 40kg 22 L 460 kg 480 kg 220 kg 700 kg 300 kg / 800 kg 115 km/h 3.2 m

PATHCROSS X 1000 L MUD



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke EFI Engine
63.7kW / 6500rpm Power
101N·m Torque @ 5500rpm
Air Spring Shock Absorber System
334mm (RU) / 308mm (EU) Ground Clearance
Alloy Wheels 30×9-14 / 30×11-14 (RU)
3500LBS Winch
115km/h Maximum Speed

 Brown/Red  Grey/ Yellow

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 976 cc 91 × 75 mm Electronic Fuel Injection 63.7 kW / 6500 rpm 101 N·m / 5500 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent — Alloy Wheel 30×9-14 (RU) / 28×9-14 (EU) Alloy Wheel 30×11-14 (RU) / 28×11-14 (EU) Air Spring Shock Absorber
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Rack Capacity: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: GVW: Towing Capacity: Top Speed: Turning Radius:	2450 × 1246 × 1400 mm 1508 mm 334mm (RU) / 308mm (EU) Front / Rear: 40kg 22 L 460 kg 524 kg 200 kg 714 kg 300 kg / 800 kg 115 km/h 3.2 m



UTVs

WORKCROSS 550



PACKAGE HIGHLIGHTS

495cc Single Cylinder, 4-Stroke Engine
28kW / 6800rpm Maximum Power
46N·m / 5800rpm Maximum Torque
CVT Transmission (L-H-N-R-P)
Double A-Arm Independent Suspension
275mm Ground Clearance
35L Fuel Tank Capacity
800kg Towing Capacity

COLORS

	Radiant Red		Titanium Grey
	Glacier silver		Fire Green
	Obsidian black		Desert Tan
	True Timber		Peral white
	Sky Blue		Army Green

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	Single Cylinder, 4-Stroke 495.3 cc 91 × 76.2 mm Electronic Fuel Injection 28kW / 6800rpm 46N·m / 5800rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 200mm / R 210mm Steel Wheel 25×8-12 Steel Wheel 25×10-12 Preloaded, Oil Damped
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Front Tread: Rear Tread: Ground Clearance: Cargo Bed Dimensions: Cargo Bed Capacity: Winch Capacity: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: Gross Vehicle Weight: Towing Capacity: Battery: Max Speed: Turning Radius:	2910 × 1460 × 1993 mm 1963 mm 1208 mm 1098 mm 275 mm 800 × 1080 × 286 mm 551 lb (250 kg) 3500 lb 35 L 618 kg 650 kg 400 kg 1050 kg 1763 lb (800 kg) 12V 32Ah 85 km/h (53 mph) 4.6 m

WORKCROSS 650-3



PACKAGE HIGHLIGHTS

649cc V-Twin 4-Stroke Engine
 39.5kW / 6300rpm Maximum Power
 62N·m / 5300rpm Maximum Torque
 CVT Transmission (L-H-N-R-P)
 Double A-Arm Independent Suspension
 283mm Ground Clearance
 3500lb Winch
 100km/h Top Speed

COLORS

	Radiant Red		Titanium Grey
	Glacier silver		Fire Green
	Obsidian black		Desert Tan
	True Timber		Peral white
	Sky Blue		Army Green

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	649 cc
Cylinder Bore × Stroke:	82 × 61.5 mm
Fuel System:	Electronic Fuel Injection
Max Power:	39.5kW / 6300rpm
Max Torque:	62N·m / 5300rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R-P

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent
Front / Rear Suspension Travel:	254/245
Front Rim / Tires:	Steel Wheel 26×9-14
Rear Rim / Tires:	Steel Wheel 26×11-14
Shocks:	Preloaded, Oil Damped

DIMENSIONS AND WEIGHT

Length × Width × Height:	3095 × 1700 × 2090 mm
Wheelbase:	2145 mm
Ground Clearance:	310 mm
Cargo Bed Dimensions:	920×1260 × 285 mm
Cargo Bed Capacity:	454 kg(1000lbs)
Winch Capacity:	3500 lbs
Fuel Capacity:	48 L
Dry Weight:	684 kg
Curb Weight:	725 kg(1595.4lbs)
Max Carrying Capacity:	578 kg
Gross Vehicle Weight:	1303 kg(2866.6lbs)
Towing Capacity:	600 kg(1320lbs)
Max Speed:	90 km/h
Turning Radius:	5 m

WORKCROSS 650-3 HV



PACKAGE HIGHLIGHTS

V-Twin Cylinder, 4-Stroke Engine
CVT Transmission
Electric Power Steering (EPS)
3,500 lbs Front Winch with Wireless Controller
Flip Glass Front Windshield with Wiper
Rear Full Windshield (Standard)
Heavy-Duty Front & Rear Bumpers
14" Alloy Rims with 27" Off-Road Tires
Standard Black Leather Seats (3-Person)

COLORS

	Radiant Red		Titanium Grey
	Glacier silver		Fire Green
	Obsidian black		Desert Tan
	True Timber		Peral white
	Sky Blue		Army Green

ENGINE

Engine Type:	V-Twin Cylinder,4-Stroke
Engine Displacement (cc):	649
Compression Ratio:	10.3:1
Fuel System:	Electronic Fuel Injection
Max Power Output:	39kw/6500RPM
Max Torque:	57N.m5300RPM
Cooling:	Liquid Cooled
Starter:	Electric
Transmission:	CVT

SUSPENSION/ WHEELS/BRAKES

Front/Rear Suspension:	Double A-Arm Independent
Shocks:	Gas Shock
Front Tires:	Alloy Wheel 27×9-14
Rear Tires:	Alloy Wheel 27×11-14
Brakes (Front/Rear):	Disc brake

DIMENSIONS AND WEIGHT

Overall Vehicle (L×W×H):	3075×1650×1980mm
Wheel Base:	2145mm
Front Tread:	1354mm
Rear Tread:	1354mm
Ground Clearance:	305mm
Cargo Bed Dump Type:	Manual
Rack Capacity (Front/Rear):	1000lbs(454kgs)
Person Capacity:	3
Fuel Capacity:	12 Gallons (45.4 L)
Curb Weight:	1595.4 lbs (725kgs)
Towing Capacity:	1320 lbs/600kgs
Certification:	EPA

WORKCROSS 800-3



PACKAGE HIGHLIGHTS

800cc V-Twin 4-Stroke Engine
44kW / 6500rpm Maximum Power
73N·m / 5000rpm Maximum Torque
Double A-Arm Independent Suspension
310mm Ground Clearance
48L Fuel Tank Capacity
1000lbs (454kg) Cargo Bed Load
3500lbs Winch

COLORS

-  Radiant Red
-  Titanium Grey
-  Glacier silver
-  Fire Green
-  Obsidian black
-  Desert Tan
-  True Timber
-  Peral white
-  Sky Blue
-  Army Green

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 800 cc 91 × 61.5 mm Electronic Fuel Injection 44 kW / 6500 rpm 73 N·m / 5000 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 254mm / R 245mm Alloy Wheel 27×9-R14 Alloy Wheel 27×11-R14 Hydraulic Airbag Damping Shock
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Cargo Bed Dimensions: Cargo Bed Capacity: Winch: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: Gross Vehicle Weight: Towing Capacity: Max Speed: Turning Radius:	3095 × 1700 × 2090 mm 2145 mm 310 mm 920 × 1260 × 285 mm 1000 lbs (454 kg) 3500 lbs 48 L 684 kg 725 kg 578 kg 1303 kg 1320 lbs (600 kg) 95 km/h 5 m

WORKCROSS 800-6



PACKAGE HIGHLIGHTS

800cc V-Twin 4-Stroke Engine
 44 kW / 6500 rpm Maximum Power
 73 N·m / 5000 rpm Maximum Torque
 6-seater Utility Design
 Double A-Arm Independent Suspension
 310 mm Ground Clearance
 48 L Fuel Tank
 1000 lbs (454 kg) Cargo Capacity

COLORS

	Radiant Red		Titanium Grey
	Glacier silver		Fire Green
	Obsidian black		Desert Tan
	True Timber		Peral white
	Sky Blue		Army Green

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	800 cc
Cylinder Bore × Stroke:	91 × 61.5 mm
Fuel System:	Electronic Fuel Injection
Max Power:	44 kW / 6500 rpm
Max Torque:	73 N·m / 5000 rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R-P

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent
Front / Rear Suspension Travel:	F 254 mm / R 245 mm
Front Rim / Tires:	Alloy Wheel 27 × 9-R14
Rear Rim / Tires:	Alloy Wheel 27 × 11-R14
Shocks:	Hydraulic Airbag Damping Shock

DIMENSIONS AND WEIGHT

Length × Width × Height:	3995 × 1700 × 2090 mm
Wheelbase:	2970 mm
Ground Clearance:	310 mm
Cargo Bed Dimensions:	920 × 1260 × 285 mm
Cargo Bed Capacity:	1000 lbs (454 kg)
Winch:	3500 lbs
Fuel Capacity:	48 L
Dry Weight:	902 kg
Curb Weight:	945 kg
Max Carrying Capacity:	578 kg
Gross Vehicle Weight:	1523 kg
Towing Capacity:	1320 lbs / 600 kg
Max Speed:	95km/h
Turning Radius:	6 m

WORKCROSS 800-3 HV



PACKAGE HIGHLIGHTS

800 cc V-Twin EFI Engine
44 kW Power / 73 N·m Torque
Hydraulic Airbag Shock System
3925 mm Track Length Equivalent
Performance
48 L Fuel Capacity
Double A-Arm Independent Suspension
310 mm Ground Clearance
95 km/h Top Speed

COLORS

- | | |
|--|---|
|  Radiant Red |  Titanium Grey |
|  Glacier silver |  Fire Green |
|  Obsidian black |  Desert Tan |
|  True Timber |  Peral white |
|  Sky Blue |  Army Green |

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	800 cc
Cylinder Bore × Stroke:	91 × 61.5 mm
Fuel System:	Electronic Fuel Injection
Max Power:	44 kW / 6500 rpm
Max Torque:	73 N·m / 5000 rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT L-H-N-R-P

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent
Front / Rear Suspension Travel:	F 254 mm / R 245 mm
Front Rim / Tires:	Alloy Wheel 27 × 9-R14
Rear Rim / Tires:	Alloy Wheel 27 × 11-R14
Shocks:	Hydraulic Airbag Damping Shock

DIMENSIONS AND WEIGHT

Length × Width × Height:	3095 × 1700 × 2090
Wheelbase:	2145 mm
Front / Rear Tread:	1340 / 1293 mm
Ground Clearance:	310 mm
Cargo Bed:	920 × 1260 × 285 mm
Capacity:	1000 lbs (454 kg)
Fuel Tank:	48 L
Curb Weight:	725 kg
GVW:	1303 kg
Towing Capacity:	1320 lbs / 600 kg
Battery:	12 V 45 Ah
Top Speed:	95 km/h
Turning Radius:	5 m

WORKCROSS 800-6 HV



PACKAGE HIGHLIGHTS

800 cc V-Twin 4-Stroke Engine
44 kW Power / 73 N·m Torque
6-Seat Utility Configuration
Hydraulic Airbag Shock System
Double A-Arm Independent Suspension
310 mm Ground Clearance
48 L Fuel Tank Capacity
6 m Turning Radius

COLORS

- | | |
|--|---|
|  Radiant Red |  Titanium Grey |
|  Glacier silver |  Fire Green |
|  Obsidian black |  Desert Tan |
|  True Timber |  Peral white |
|  Sky Blue |  Army Green |

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	800 cc
Bore Stroke:	91 × 61.5 mm
Fuel System:	EFI
Max Power:	44 kW / 6500 rpm
Max Torque:	73 N·m / 5000 rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT L-H-N-R-P

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent
Front / Rear Suspension Travel:	F 254 mm / R 245 mm
Front Rim / Tires:	Alloy Wheel 27 × 9-R14
Rear Rim / Tires:	Alloy Wheel 27 × 11-R14
Shocks:	Hydraulic Airbag Damping Shock

DIMENSIONS AND WEIGHT

Length × Width × Height:	3995 × 1700 × 2090 mm
Wheelbase:	2970 mm
Ground Clearance:	310 mm
Fuel Capacity:	48 L
Dry Weight:	902 kg
Curb Weight:	945 kg
Max Carrying Capacity:	578 kg
Gross Vehicle Weight:	1523 kg
Towing Capacity:	1320 lbs / 600 kg
Top Speed: :	95 km/h
Turning Radius:	6 m

WORKCROSS 1000-3



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke EFI Engine
 53kW / 6500rpm Maximum Power
 85N·m / 5500rpm Maximum Torque
 Double A-Arm Independent Suspension
 310mm Ground Clearance
 48L Fuel Capacity
 1000lbs (454kg) Cargo Bed Capacity
 3500lbs Winch

COLORS

	Radiant Red		Titanium Grey
	Glacier silver		Fire Green
	Obsidian black		Desert Tan
	True Timber		Peral white
	Sky Blue		Army Green

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	976 cc
Cylinder Bore × Stroke:	91 × 75 mm
Fuel System:	Electronic Fuel Injection
Max Power:	53 kW / 6500 rpm
Max Torque:	85 N·m / 5500 rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R-P

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent
Front / Rear Suspension Travel:	F 254mm / R 245mm
Front Rim / Tires:	Alloy Wheel 27×9-R14
Rear Rim / Tires:	Alloy Wheel 27×11-R14
Shocks:	Hydraulic Airbag Damping Shock

DIMENSIONS AND WEIGHT

Length × Width × Height:	3095 × 1700 × 2090 mm
Wheelbase:	2145 mm
Ground Clearance:	310 mm
Cargo Bed :	920 × 1260 × 285 mm
Cargo Capacity:	1000 lbs (454 kg)
Winch:	3500 lbs
Fuel Capacity:	48 L
Dry Weight:	794 kg
Curb Weight:	835 kg
Max Carrying:	578 kg
Gross Vehicle Weight:	1413 kg
Towing Capacity:	1760 lbs / 800 kg
Top Speed:	100 km/h
Turning Radius:	5 m

WORKCROSS 1000-6



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke Engine
53kW / 6500rpm Power
85N·m / 5500rpm Torque
6-Seater Utility Configuration
310mm Ground Clearance
Hydraulic Airbag Damping Suspension
48L Fuel Tank
3500lbs Winch

COLORS

-  Radiant Red
-  Titanium Grey
-  Glacier silver
-  Fire Green
-  Obsidian black
-  Desert Tan
-  True Timber
-  Peral white
-  Sky Blue
-  Army Green

ENGINE Engine Type: Displacement: Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling : Starter: Transmission:	V-Twin Cylinder, 4-Stroke 976 cc 91 × 75 mm EFI 53 kW / 6500 rpm 85 N·m / 5500 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 254mm / R 245mm Alloy Wheel 27×9-R14 Alloy Wheel 27×11-R14 Hydraulic Airbag Damping Shock
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Cargo Bed: Capacity: Winch: Fuel Capacity: Dry Weight: Curb Weight: Gross Vehicle Weight: Towing Capacity: Top Speed: Turning Radius:	3995 × 1700 × 2090 mm 2970 mm 310 mm 920 × 1260 × 285 mm 1000 lbs (454 kg) 3500 lbs 48 L 902 kg 945 kg 1523 kg 1760 lbs / 800 kg 100 km/h 6 m

WORKCROSS 1000-3 HV



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke Engine
53kW Power / 85N·m Torque
Hydraulic Airbag Shock System
Enhanced HVAC-Ready Platform
310mm Ground Clearance
48L Fuel Tank Capacity
1760lbs (800kg) Towing Capacity
100 km/h Maximum Speed

COLORS

-  Radiant Red
-  Titanium Grey
-  Glacier silver
-  Fire Green
-  Obsidian black
-  Desert Tan
-  True Timber
-  Peral white
-  Sky Blue
-  Army Green

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	976 cc
Bore × Stroke:	91 × 75 mm
Fuel System:	EFI
Max Power:	53 kW / 6500 rpm
Max Torque:	85 N·m / 5500 rpm
Cooling:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R-P

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent
Front / Rear Suspension Travel:	F 254mm / R 245mm
Front Rim / Tires:	Alloy Wheel 27×9-R14
Rear Rim / Tires:	Alloy Wheel 27×11-R14
Shocks:	Hydraulic Airbag Damping Shock

DIMENSIONS AND WEIGHT

Length × Width × Height:	3095 × 1700 × 2090 mm
Wheelbase:	2145 mm
Ground Clearance:	310 mm
Cargo Bed :	920 × 1260 × 285 mm
Cargo Capacity:	1000 lbs (454 kg)
Fuel Capacity:	48 L
Dry Weight:	824 kg
Curb Weight:	865 kg
Gross Vehicle Weight:	1433 kg
Towing Capacity:	1760 lbs / 800 kg
Top Speed:	100 km/h

WORKCROSS 1000-6 HV



PACKAGE HIGHLIGHTS

976cc V-Twin EFI Engine
53kW / 6500rpm Power Output
85N·m / 5500rpm Torque
6-Seater Utility Design
310mm Ground Clearance
1760lbs Towing Capacity
48L Fuel Capacity
Hydraulic Airbag Damping Shock

COLORS

	Radiant Red		Titanium Grey
	Glacier silver		Fire Green
	Obsidian black		Desert Tan
	True Timber		Peral white
	Sky Blue		Army Green

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	976 cc
Bore × Stroke:	91 × 75 mm
Fuel System:	EFI
Max Power:	53 kW / 6500 rpm
Max Torque:	85 N·m / 5500 rpm
Cooling:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R-P

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent
Front / Rear Travel:	F 254mm / R 245mm
Front Rim / Tires:	Alloy Wheel 27×9-R14
Rear Rim / Tires:	27×11-R14
Shocks:	Hydraulic Airbag Damping

DIMENSIONS AND WEIGHT

Length × Width × Height:	3995 × 1700 × 2090 mm
Wheelbase:	2970 mm
Ground Clearance:	310 mm
Cargo Bed :	920 × 1260 × 285 mm
Capacity:	1000 lbs (454 kg)
Fuel Capacity:	48 L
Dry Weight:	997kg
Curb Weight:	2288.5lbs(1040kgs)
Gross Vehicle Weight:	3559.6(1618kgs)
Towing Capacity:	1760 lbs / 800 kg
Top Speed:	100 km/h
Turning Radius:	6 m

WORKCROSS 1000-3 HVAC



PACKAGE HIGHLIGHTS

976cc V-Twin Engine with HVAC System
53kW / 6500rpm Power
85N·m Torque/ 5500rpm
Enclosed Cabin Comfort
Hydraulic Airbag Suspension
48L Fuel Tank
310mm Ground Clearance
3500lbs Winch

COLORS

-  Radiant Red
-  Titanium Grey
-  Glacier silver
-  Fire Green
-  Obsidian black
-  Desert Tan
-  True Timber
-  Peral white
-  Sky Blue
-  Army Green

ENGINE Engine Type: Displacement: Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 976 cc 91 × 75 mm EFI 53 kW / 6500 rpm 85 N·m / 5500 rpm Liquid Cooled Electric CVT, L-H-N-R-P
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Suspension Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 254mm / R 245mm Alloy Wheel 27×9-R15 Alloy Wheel 27×11-R15 Hydraulic Airbag Damping Shock
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Cargo Bed : Fuel Capacity: Dry Weight: Curb Weight:: Gross Vehicle Weight: Towing Capacity: Top Speed: Turning Radius:	3995 × 1700 × 2090 mm 2145 mm 310 mm 920 × 1260 × 285 mm 48 L 844 kg 885 kg 1463 kg 1760 lbs / 800 kg 100 km/h 5 m

WORKCROSS 1000-6 HVAC



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke Engine
Integrated HVAC Climate Cabin
53kW / 6500rpm Power
85N·m / 5500rpm Torque
6-Seater Premium Utility Layout
310mm Ground Clearance
48L Fuel Capacity
1760lbs (800kg) Towing Capacity

COLORS

- | | |
|--|---|
|  Radiant Red |  Titanium Grey |
|  Glacier silver |  Fire Green |
|  Obsidian black |  Desert Tan |
|  True Timber |  Peral white |
|  Sky Blue |  Army Green |

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	976 cc
Bore × Stroke:	91 × 75 mm
Fuel System:	EFI
Max Power:	53 kW / 6500 rpm
Max Torque:	85 N·m / 5500 rpm
Cooling:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R-P

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent
Front / Rear Travel:	F 254mm / R 245mm
Front Rim / Tires:	Alloy Wheel 27×9-R15
Rear Rim / Tires:	27×11-R15
Shocks:	Hydraulic Airbag Damping

DIMENSIONS AND WEIGHT

Length × Width × Height:	3995 × 1700 × 2090 mm
Wheelbase:	2970 mm
Ground Clearance:	310 mm
Cargo Bed :	920 × 1260 × 285 mm
Capacity:	1000 lbs (454 kg)
Fuel Capacity:	48 L
Dry Weight:	1017 kg
Curb Weight:	1060 kg
Gross Vehicle Weight:	1638 kg
Towing Capacity:	1760 lbs / 800 kg
Top Speed:	100 km/h
Turning Radius:	6 m

DESERTCROSS 1000-3



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke EFI Engine
53kW / 6500rpm Maximum Power
85N·m / 5500rpm Maximum Torque
Double A-Arm Independent Suspension
310mm Ground Clearance
48L Fuel Capacity
1000lbs (454kg) Cargo Bed Capacity
3500lbs Winch
Powerful 976 cc V-Twin
EFI engine delivering 63.7 kW / 101 N·m
Liquid-cooled system

COLORS

 Obsidian black  Desert Tan

ENGINE Engine Type: Displacement: Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 976 cc 91 × 75 mm Electronic Fuel Injection (EFI) Max Power: 63.7 kW / 6500 RPM 101 N·m / 5500 RPM Liquid Cooled Electric CVT (L-H-N-R-P)
SUSPENSION AND WHEELS Front / Rear Suspension: Front / Rear Travel: Front Rim / Tires: Rear Rim / Tires: Shocks:	Double A-Arm Independent F 200 mm / R 243 mm Alloy Wheel 27 × 9-14 Alloy Wheel 27 × 11-14 Preloaded, Oil Damped
DIMENSIONS AND WEIGHT Length × Width × Height: Wheelbase: Ground Clearance: Cargo Bed Dimensions : Cargo Bed Capacity: Fuel Capacity: Dry Weight: Curb Weight: Gross Vehicle Weight: Towing Capacity: Max Speed: Turning Radius:	3380 × 1880 × 1980 mm 2310 mm 330 mm 1077 × 1626 × 255 mm 400 kg 48 L 809 kg 850 kg 1510 kg 1000 kg 100 km/h 5.1 m



SNOWMOBILES

SNOWCROSS 800 WT



PACKAGE HIGHLIGHTS

800cc V-Twin 4-Stroke Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
LTS / EasyRide Suspension
Preloaded, Oil Damped Rear Shock
3925×500×40mm Track
42L Fuel Tank
Top Speed: 80km/h

COLORS

-  Black
-  Sand
-  Brown/Red

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 800cc 91×61.5mm Electronic Fuel Injection 44.0kW / 6000rpm 73N·m / 5000rpm Liquid Cooled Electric CVT, L-H-N-R
SUSPENSION AND WHEELS Front / Rear Suspension: Shocks: Front / Rear Suspension Travel: Ski Center: Track:	LTS / EasyRide Preloaded, Oil Damped 160mm / 219mm 900mm 3925×500×40mm
DIMENSIONS AND WEIGHT Length × Width × Height: Ground Clearance: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: Towing Capacity: Max Speed:	3240×1200×1500mm 191mm 42L 268kg 306kg 205kg 544kg 80km/h

SNOWCROSS 800 WT LTS



PACKAGE HIGHLIGHTS

800cc V-Twin 4-Stroke Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
LTS / EasyRide Suspension
Preloaded, Oil Damped Rear Shock
3925×500×40mm Track
42L Fuel Tank
Top Speed: 80km/h

COLORS

-  Black
-  Sand
-  Brown/Red

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 800cc 91×61.5mm Electronic Fuel Injection 44.0kW / 6000rpm 73N·m / 5000rpm Liquid Cooled Electric CVT, L-H-N-R
SUSPENSION AND WHEELS Front / Rear Suspension: Shocks: Front / Rear Suspension Travel: Ski Center: Track:	LTS / EasyRide Preloaded, Oil Damped 110mm / 219mm 900mm 3925×500×40mm
DIMENSIONS AND WEIGHT Length × Width × Height: Ground Clearance: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: Towing Capacity: Max Speed:	3240×1200×1500mm 184mm 42L 294kg 332kg 205kg 544kg 80km/h

SNOWCROSS 1000 WT



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
Double A-Arm Independent Front Suspension
Airbag Shock
3925×500×40mm Track
42L Fuel Tank
Top Speed: 90km/h

COLORS

 Red

 White

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	976cc
Cylinder Bore × Stroke:	91×75mm
Fuel System:	Electronic Fuel Injection
Max Power:	63.7kW / 6500rpm
Max Torque:	101N·m / 5500rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent / Easy ride
Shocks:	Airbag Shock
Front / Rear Suspension Travel:	160mm / 219mm
Ski Center:	996mm
Track:	3925×500×40mm

DIMENSIONS AND WEIGHT

Length × Width × Height:	3240×1200×1500mm
Ground Clearance:	191mm
Fuel Capacity:	42L
Dry Weight:	290kg
Curb Weight:	328kg
Max Carrying Capacity:	205kg
Towing Capacity:	544kg
Max Speed:	90km/h

SNOWCROSS 1000 SWT



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
Double A-Arm Independent Heavy duty Suspension
Airbag Shock
3925×600×40mm Track
42L Fuel Tank
Top Speed: 90km/h

COLORS

 Red  White

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 976cc 91×75mm Electronic Fuel Injection 63.7kW / 6500rpm 101N·m / 5500rpm Liquid Cooled Electric CVT, L-H-N-R
SUSPENSION AND WHEELS Front / Rear Suspension: Shocks: Front / Rear Suspension Travel: Ski Center: Track:	Double A-Arm Independent / Heavy duty Airbag Shock 160mm / 219mm 996mm 3925×600×40mm
DIMENSIONS AND WEIGHT Length × Width × Height: Ground Clearance: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: Towing Capacity: Max Speed:	3240×1200×1500mm 161mm 42L 316kg 354kg 205kg 544kg 90km/h

SNOWCROSS 1000 SWT SC



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
Double A-Arm Independent Front Suspension
Oil Damped Shock
3925×600×40mm Track
42L Fuel Tank
Top Speed: 90km/h

COLORS

 Red  White

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 976cc 91×75mm Electronic Fuel Injection 63.7kW / 6500rpm 101N·m / 5500rpm Liquid Cooled Electric CVT, L-H-N-R
SUSPENSION AND WHEELS Front / Rear Suspension: Shocks: Front / Rear Suspension Travel: Ski Center: Track:	Double A-Arm Independent / Heavy duty Airbag shock 160mm / 219mm 996mm 3925×600×40mm
DIMENSIONS AND WEIGHT Length × Width × Height: Ground Clearance: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: Towing Capacity: Max Speed:	3240×1200×1500mm 191mm 42L 316kg 354kg 205kg 544kg 90km/h

SNOWCROSS 1000 WT LTS



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
LTS / EasyRide Suspension System
Preloaded, Oil Damped Shock
3925×500×40mm Track
42L Fuel Tank
Top Speed: 90km/h

COLORS

 Red

 White

ENGINE

Engine Type:	V-Twin Cylinder, 4-Stroke
Displacement:	976cc
Cylinder Bore × Stroke:	91×75mm
Fuel System:	Electronic Fuel Injection
Max Power:	63.7kW / 6500rpm
Max Torque:	101N·m / 5500rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R

SUSPENSION AND WHEELS

Front / Rear Suspension:	LTS / EasyRide
Shocks:	Oil Damped
Front / Rear Suspension Travel:	110mm / 219mm
Ski Center:	900mm
Track:	3925×500×40mm

DIMENSIONS AND WEIGHT

Length × Width × Height:	3240×1200×1500mm
Ground Clearance:	184mm
Fuel Capacity:	42L
Dry Weight:	278kg
Curb Weight:	316kg
Max Carrying Capacity:	205kg
Towing Capacity:	544kg
Max Speed:	90km/h

SNOWCROSS 1000 SWT LTS



PACKAGE HIGHLIGHTS

976cc V-Twin 4-Stroke Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
LTS / EasyRide Suspension
Preloaded, Oil Damped Shock
3925×600×40mm Track
42L Fuel Tank
Top Speed: 90km/h

COLORS

 Red  White

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	V-Twin Cylinder, 4-Stroke 976cc 91×75mm Electronic Fuel Injection 63.7kW / 6500rpm 101N·m / 5500rpm Liquid Cooled Electric CVT, L-H-N-R
SUSPENSION AND WHEELS Front / Rear Suspension: Shocks: Front / Rear Suspension Travel: Ski Center: Track:	LTS / EasyRide Oil Damped 110mm / 219mm 900mm 3925×600×40mm
DIMENSIONS AND WEIGHT Length × Width × Height: Ground Clearance: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: Towing Capacity: Max Speed:	3240×1200×1500mm 184mm 42L 304kg 342kg 205kg 544kg 90km/h

FROSTCROSS 900T WT



PACKAGE HIGHLIGHTS

899cc In-line 3-Cylinder 4-Stroke
Turbo Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
Double A-Arm Independent
Suspension
Airbag Shock Rear Suspension
3925×500×40mm Track
42L Fuel Tank
Top Speed: 140km/h

Black Sand
Blue Brown/Red

ENGINE Engine Type: Displacement: Cylinder Bore × Stroke: Fuel System: Max Power: Max Torque: Cooling System: Starter: Transmission:	In-line 3-Cylinder, 4-Stroke, Turbo 899cc 74×69.7mm Electronic Fuel Injection 128kW / 7900rpm 165N·m / 7000rpm Liquid Cooled Electric CVT, L-H-N-R
SUSPENSION AND WHEELS Front / Rear Suspension: Shocks: Front / Rear Suspension Travel: Ski Center: Track:	Double A-Arm Independent / Easy ride Airbag Shock 160mm / 219mm 996mm 3925×500×40mm
DIMENSIONS AND WEIGHT Length × Width × Height: Ground Clearance: Fuel Capacity: Dry Weight: Curb Weight: Max Carrying Capacity: Towing Capacity: Max Speed:	3240×1200×1500mm 191mm 42L 290kg 328kg 205kg 544kg 140km/h

FROSTCROSS 900T SWT



PACKAGE HIGHLIGHTS

899cc In-line 3-Cylinder 4-Stroke
Turbo Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
Double A-Arm Independent Heavy
Suspension
Preloaded, Oil Damped Rear Shock
3925×600×40mm Track
42L Fuel Tank
Top Speed: 140km/h

- Black
- Sand
- Blue
- Brown/Red

ENGINE

Engine Type:	In-line 3-Cylinder, 4-Stroke, Turbo
Displacement:	899cc
Cylinder Bore × Stroke:	74×69.7mm
Fuel System:	Fuel System: Electronic Fuel Injection
Max Power:	128kW / 7900rpm
Max Torque:	165N·m / 7000rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent / Heavy duty
Shocks:	Preloaded, Oil Damped
Front / Rear Suspension Travel:	160mm / 170mm
Ski Center:	996mm
Track:	3925×600×40mm

DIMENSIONS AND WEIGHT

Length × Width × Height:	3240×1200×1500mm
Ground Clearance:	161mm
Fuel Capacity:	42L
Dry Weight:	316kg
Curb Weight:	354kg
Max Carrying Capacity:	205kg
Towing Capacity:	544kg
Max Speed:	140km/h

FROSTCROSS 900T SWT SC



PACKAGE HIGHLIGHTS

899cc In-line 3-Cylinder 4-Stroke
Turbo Engine
Electronic Fuel Injection System
Liquid Cooling / Electric Start
Double A-Arm Independent Easy
Suspension
Airbag Shock Rear Suspension
3925×600×40mm Track
42L Fuel Tank
Top Speed: 140km/h

Black Sand
Blue Brown/Red

ENGINE

Engine Type:	In-line 3-Cylinder, 4-Stroke, Turbo
Displacement:	899cc
Cylinder Bore × Stroke:	74×69.7mm
Fuel System:	Fuel System: Electronic Fuel Injection
Max Power:	128kW / 7900rpm
Max Torque:	165N·m / 7000rpm
Cooling System:	Liquid Cooled
Starter:	Electric
Transmission:	CVT, L-H-N-R

SUSPENSION AND WHEELS

Front / Rear Suspension:	Double A-Arm Independent / Easy ride
Shocks:	Airbag Shock
Front / Rear Suspension Travel:	160mm / 219mm
Ski Center:	996mm
Track:	3925×600×40mm

DIMENSIONS AND WEIGHT

Length × Width × Height:	3240×1200×1500mm
Ground Clearance:	191mm
Fuel Capacity:	42L
Dry Weight:	316kg
Curb Weight:	354kg
Max Carrying Capacity:	205kg
Towing Capacity:	544kg
Max Speed:	140km/h



DIRT BIKES

AODES A110



PACKAGE HIGHLIGHTS

110cc air-cooled 4-stroke engine
Compact and lightweight: 86kg
Seat height: 770mm
Inverted front suspension, 180mm travel
Adjustable rear shock, 45mm travel
6L fuel tank for longer range
Top speed: 80km/h
Easy handling for beginner riders

BASIC INFORMATION

Dimension (mm):	1480×660×970
Ground Clearance(mm):	280
Wheelbase (mm):	1080
Seat Height (mm):	770
Wet Weight (kg):	86
Max Load (kg):	75

ENGINE

Model: Fuel Supply:	W 110, Single Cylinder, 4-Stroke, Air Cooled
Fuel Supply:	Carburetor
Max Power (kW/rpm):	4.8kW / 8000rpm
Max Torque (N·m/rpm):	7.2N·m / 5000rpm
Bore × Stroke (mm):	52.4 × 49.5
Compression Ratio:	9.0 : 1

PERFORMANCE

Fuel Capacity (L):	6.0
Max Speed (km/h):	80
Front Suspension:	Inverted Front Fork, Travel 180mm
Rear Suspension:	Adjustable Rear Shock, Travel 45m

TYRES

Front Tyre Size:	60/100-14
Rear Tyre Size:	80/100-12

AODES A125



PACKAGE HIGHLIGHTS

125cc air-cooled 4-stroke engine
Electronic C.D.I ignition system
Lightweight body: 96kg
Seat height: 860mm
Inverted front suspension, 190mm travel
Adjustable rear shock, 45mm travel
Top speed: 95km/h
Fuel tank: 4.5L

BASIC INFORMATION

Dimension (mm):	1790×670×1110
Ground Clearance (mm):	290
Wheelbase (mm):	1225
Seat Height (mm):	860
Wet Weight (kg):	96
Max Load (kg):	90

ENGINE

Model:	W120, Single Cylinder, 4-Stroke, Air Cooled
Fuel Supply:	Carburetor
Max Power (kW/rpm):	5.6kW / 8000rpm
Max Torque (N·m/rpm):	8.5N·m / 5000rpm
Ignition:	C.D.I Electronic Ignition
Bore × Stroke (mm):	52.4 × 55.5
Compression Ratio:	9.3 : 1

PERFORMANCE

Fuel Capacity (L):	4.5
Max Speed (km/h):	95
Front Suspension:	Inverted Front Fork, Travel 190mm
Rear Suspension:	Adjustable Rear Shock, Travel 45mm

TYRES

Front Tyre Size:	70/100-17
Rear Tyre Size:	90/100-14